



## 快速干燥机系列

High Speed Dryer



焊品企业有限公司  
YE PIN CO., LTD

# 目录Catalog

中文 Chinese	英文 English	页数 Page
功能特色-4大提升	Feature-4 UPs	P2
功能特色-6大降低	Feature-6 Downs	P3
7大优势结构	7 advantage structures	P4
干燥效率比较	Compare Drying Efficiency	P5
含水率太高，对塑料的破坏	Water content rate is too high, it will be damage to plastic	P6
相对湿度、含水率、物性相互关系	Relationship between Relative humidity, Water content rate, Physical properties	P7
作动原理	What' s principle?	P8
化学吸附干燥机 VS YP干燥机	Chemical adsorption dryer VS YP Dryer	P9
第一回 , 省钱 , 省时, 省电	Round One, SaveTime, Money, Electriciity	P10
第二回 , 结构	Round Two , Structure	P12
第三回 , 环境	Round Three, Environment	P13
多功能快速干燥机	Multi-function High Speed Dryer	P14
光学级快速干燥机	Optics High Speed Dryer	P18
BD 微电脑快速干燥机	BD Microprocessor Controlled High Speed Dryer	P22
LD 微电脑快速干燥机	LD Microprocessor Controlled High Speed Dryer	P26

# 功能特色--4大提升


## Features—4 Up



- 提高产品的抗拉性、抗破性、透光率、耐久性
- Increasing tensile resistance, fracture resistance, transparency, durability



- 提高成型品的良率及品质
- Increasing product validity and quality



- 提高份子之間的連結
- Increasing molecule combination



- 提高生产的稼动率
- Increasing production mobility

# 功能特色--6大降低

## Features--6 Downs



- 减少一半的烘料时间
- shorten half time of drying



- 降低含水率200 ppm以下
- Reducing water contain rate under 200ppm



- 降低烘料成本，节省电费40%以上
- Reducing electricity bill more than 40%



- 减少模具清洗的次数 (PA46,PPS)
- Reducing cleaning frequency of mold(PA46,PPS)



- 减少干燥不完全所产生的不良( 流纹、气泡..等)
- Reducing defects of incomplete drying (such as streak, bubble....etc.)




- 降低原料成型时，经过料管高温混炼的所产生的气体
- Reducing the generation of gas during the injection molding




# 7大优势结构

## 7 Structures



不用接冷却水  
No cooling water



不锈钢外壳易保养  
Easy maintenance for  
stainless steel case



集尘器  
Dust Collector



LED微电脑式控制面板  
LED microprocessor  
controlled panel



功能均用灯号显示  
Light display function



机台可移动  
Moveable



外罩式过滤器清理容易  
Easy clean for outer  
filters

- 多功能快速干燥机搭配专利截料阀,使输送管内的塑料不残留,无塑料回潮的问题。
- The 3-in-one high speed dryer device is equipped with patented valve to completely clean the plastic residue such that there will be no plastic material re-dampening problem.

### 专利截料阀 Patented Valve



已申请多国专利结构

Multi-national patent  
application structure

# 干燥效率比较

## Compare drying efficiency



效率佳  
High  
Efficiency


速度快  
High  
Speed

节能  
Energy  
Saving

YP节省电费 40% ↑

YP save electricity 40% ↑

小时/hr ~若您想询问其它材质的乾燥时间·欢迎与我们联络~  
If you would like to know other plastic material drying time  
, please contact us directly.

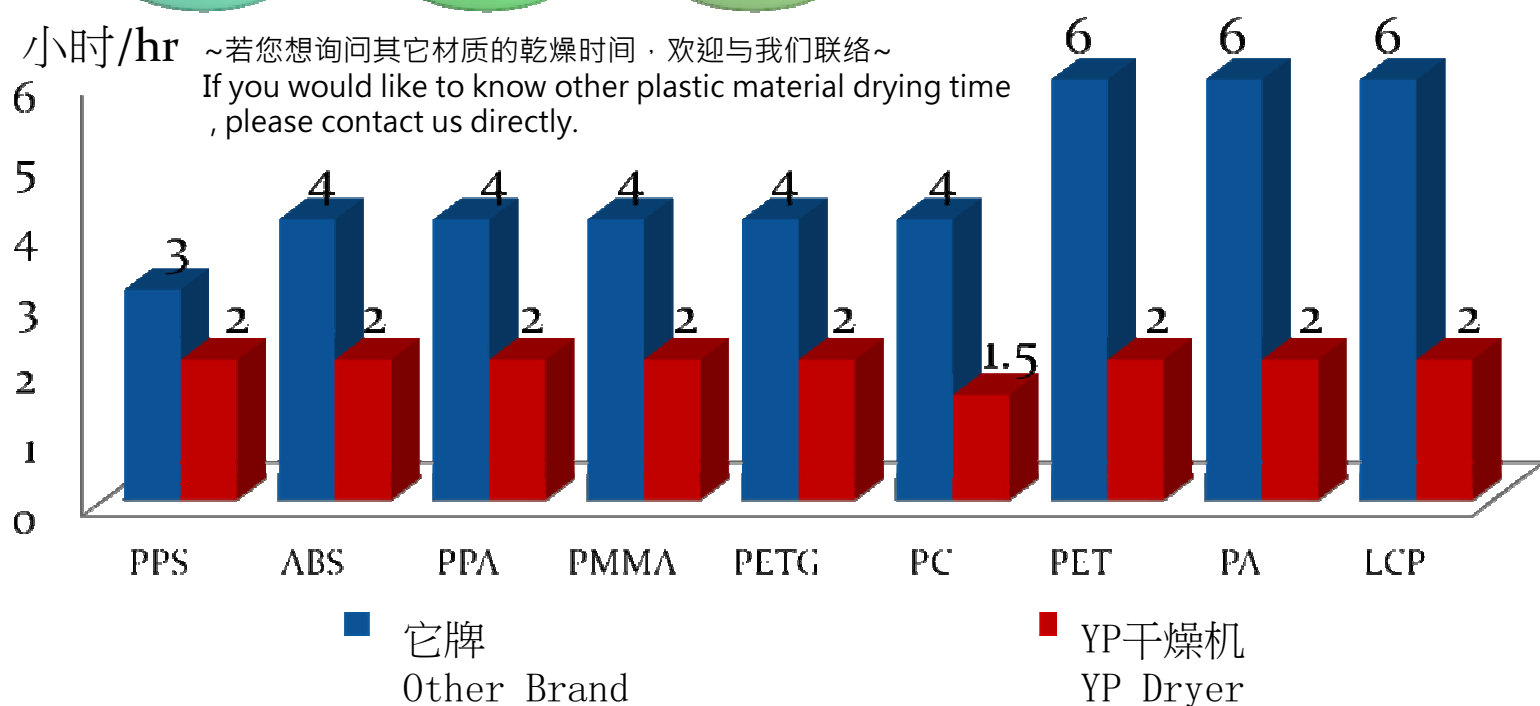

干燥时间/小时 Drying Time / Hr	PPS	ABS	PPA	PMMA	PETG	PC	PET	PA	LCP
它牌 Other Brand	3	4	4	4	4	4	6	6	6
YP干燥机 YP Dryer	2	2	2	2	2	1.5	2	2	2

# 含水率太高，对塑料之破坏

Water content rate is too high, it will be damage to plastic



若要生产高质量的塑料制品必须先注意到“前端塑料的乾燥处理”  
If you would like to produce high quality plastics, you must be aware of “drying process before injection molding”.





# 相对湿度、含水率、物性相互关系

## Relationship between Relative humidity, Water content rate, Physical properties




相对湿度%  
Relative humidity%

空气中相对湿度过高时，塑料就会快速吸湿，使塑料的含水率增加  
Relative humidity is too high in the air, plastic will humidify quickly, it will increase water content rate.

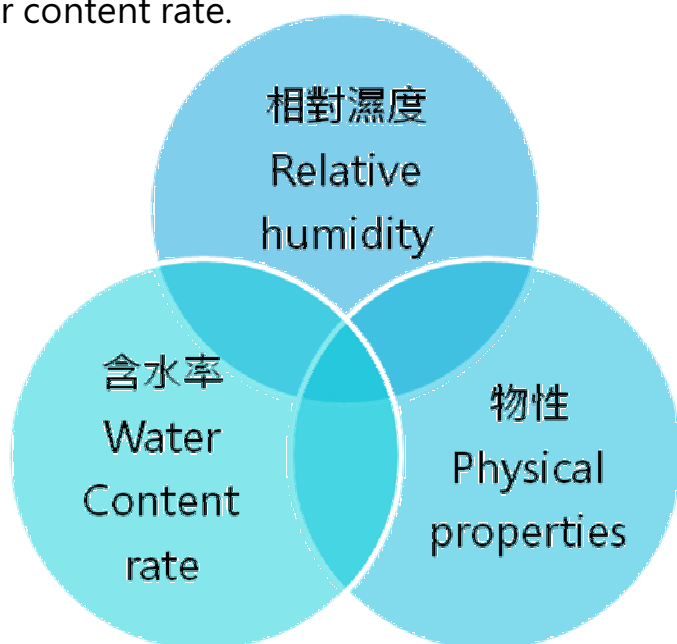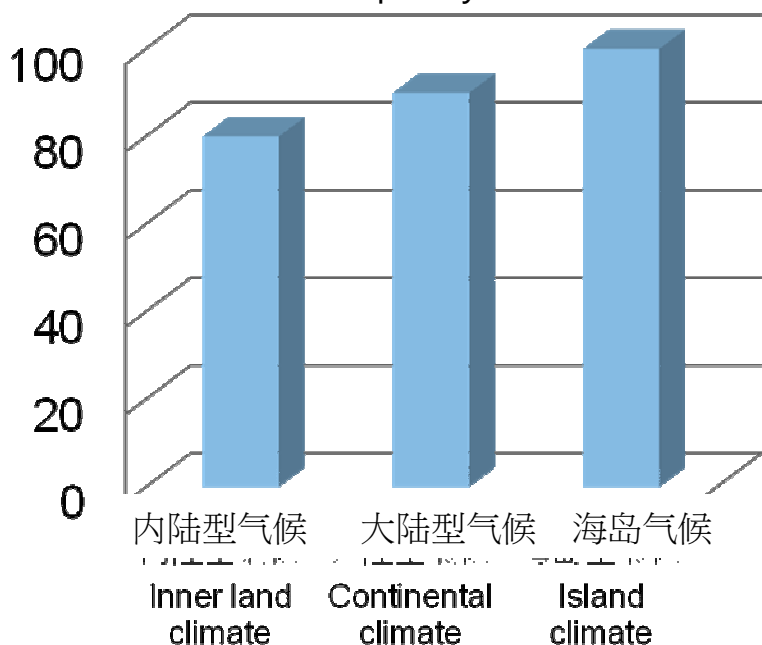

与最大值百分比  
Ratio to max bond%

含水率愈高，对物性的影响愈大  
High water content rate, it will have big influence to physical properties.

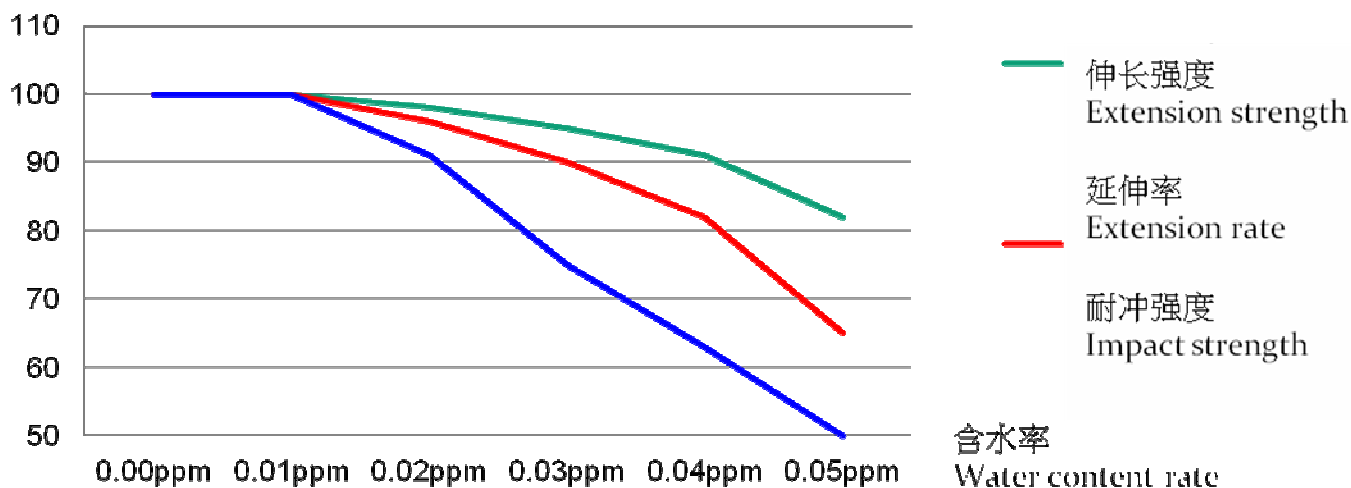





# 作动原理?

## What's principle?


低气压使水的沸点降低  
Low pressure makes  
boiling point of water  
lower.



在喜马拉雅山水的沸点是73°C  
Boiling point of water  
in the Himalayas is 73°C.

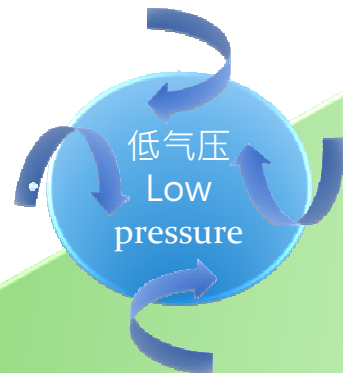

在高山水的沸点是80 °C~ 90°C  
Boiling point of water in high  
mountain is 80 °C~ 90°C.

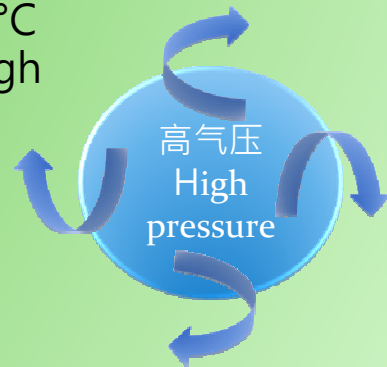

在平地水的沸点是100 °C  
Boiling point of water  
on the ground is 100 °C.




焊品的快速干燥机的干燥原理，是用物理原理，非化学吸附。简易的说：快速干燥机将空气吸入，产生低压的气流经过加热，将干燥的热风打入料桶，将塑料中的水份子蒸发，(使露点的温度达-40 °C 以下)。

Our High speed dryer uses “physical principle”, not chemical absorbing. Let me explain to you: Air had been sucked by our high speed dryer, producing low pressure air, the low pressure air through heater. It becomes drying hot air into hopper to make moisture of plastic to vaporize.(reach dew point under -40°C)



# 化学吸附干燥机 VS YP干燥机

## Chemical adsorption dryer VS YP Dryer

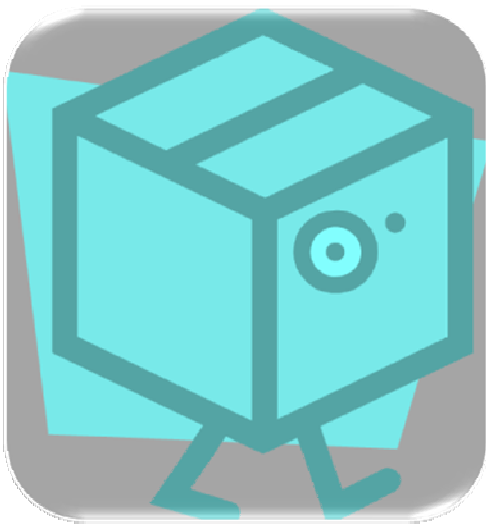

VS




决战三回合  
Three round battle



# 第一回, 省钱, 省时, 省电

Round One, Save Time, Money, Electricity

化学吸附干燥机  
Chemical adsorption dryer



YP 干燥机  
YP dryer



额外的工程费用  
Additional project costs

要接水管  
Link water pipe



无  
No



冷气费用  
Air-conditioning costs

要维持室内恒温, 冷气需持续的运作

In order to maintain the indoor temperature, air-conditioning needs to continue operations



无  
No



耗材费用  
Consumables cost

高  
High




低  
Low



# 第一回, 省钱, 省时, 省电

Round One, Save Time, Money, Electricity

化学吸附干燥机  
Chemical adsorption dryer



YP 干燥机  
YP dryer



干燥时间  
Clean room

如: PC要3~4小时  
LCP要6~8小时  
For example:  
PC needs about 3~4  
hours of drying time.  
LCP needs about 6~8  
hours of drying time.



如: PC要2小时  
LCP要2小时  
For example:  
PC needs about 2 hours  
of drying time.  
LCP needs about 2 hours of  
drying time.



耗电量  
Power consumption

高耗电量  
High power  
Consumption.



低耗电量, 约化学  
吸附干燥机的一半  
Low power consumption,  
power consumption is about  
one half of chemical  
adsorption dryer.



# 第二回，结构

## Round Two , Structure

化学吸附干燥机  
Chemical adsorption dryer



YP 干燥机  
YP dryer



### 冷却水 Cooling Water

要接冷却水  
It need to link cooling water.




不接冷却水  
No cooling water



### 外壳 Outer Case

白铁烤漆，易掉漆生锈  
Painted iron, easy to peel off and get rusty.

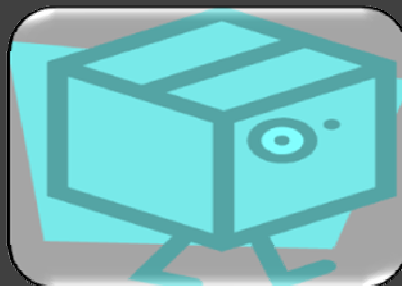

SUS304不锈钢，  
耐久不生锈  
SUS304  
stainless steel,  
durable and not  
easy to rust.



### 分子筛 Molecular sieve

如:烘PA会出油，蜂巢和  
分子筛会阻塞  
For example: Drying PA  
Will be out of oil.  
Honeycomb and  
molecular sieve will be  
clogged.



没有分子筛，  
具有专利机芯  
结构，没有阻  
塞的疑虑

No molecular sieve, dryer  
is equipped with patented  
cassette mechanism  
structure, no doubt for  
clogging.



# 第三回，环境

## Round Three, Environment



化学吸附干燥机  
Chemical adsorption dryer



YP 干燥机  
YP dryer

### 洁净的无尘室 Clean room

接冷却水，有漏水的可能性

It may leak water possibility, due to cooling water.



适用，无漏水的可能性  
Suitable, no leaking water possibility.



### 热气排放 Exhausting hot air

会排出热气  
It exhausts hot air.



无  
No exhausting hot air.



# 多功能快速干燥机


## Multi-function High Speed Dryer

多功能干燥机具有  
如下特点:

- 1.吸料和送料
- 2.除湿乾燥
- 3.除粉

Multi- function dryer has below  
features:

- 1.Suction feeder and Autoloader
- 2.Dehumidifying
- 3.Eliminating powder

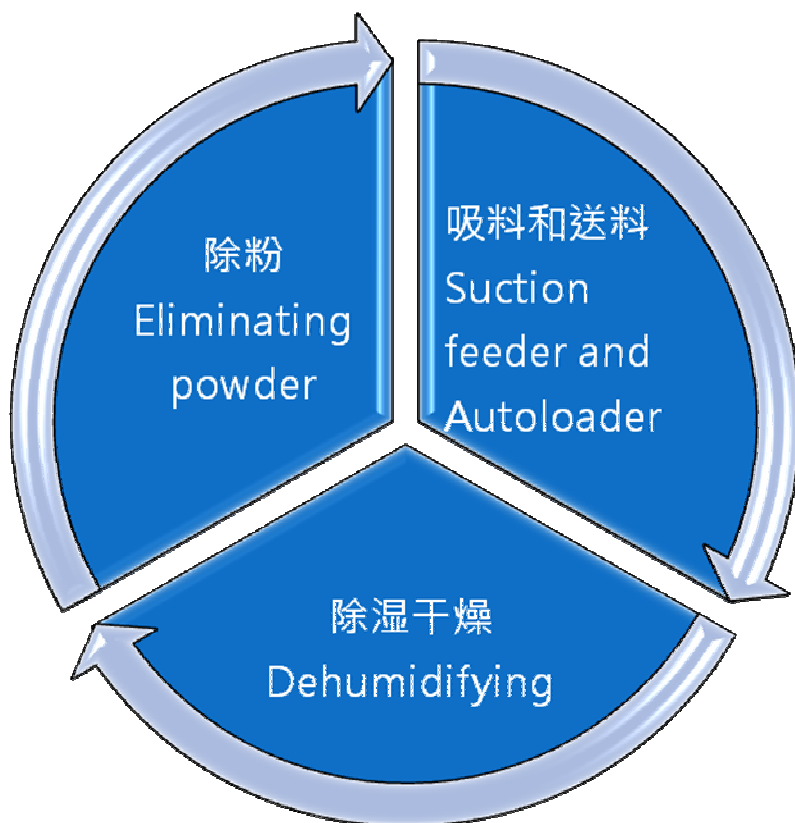


\*除粉，是指将颗粒的塑料经碰撞所产生的粉末，加以去除\*

\*Eliminating powder，means powder produced by the plastic pellet collision\*



# 多功能快速干燥机-结构

## Multi-function high speed dryer -Structure

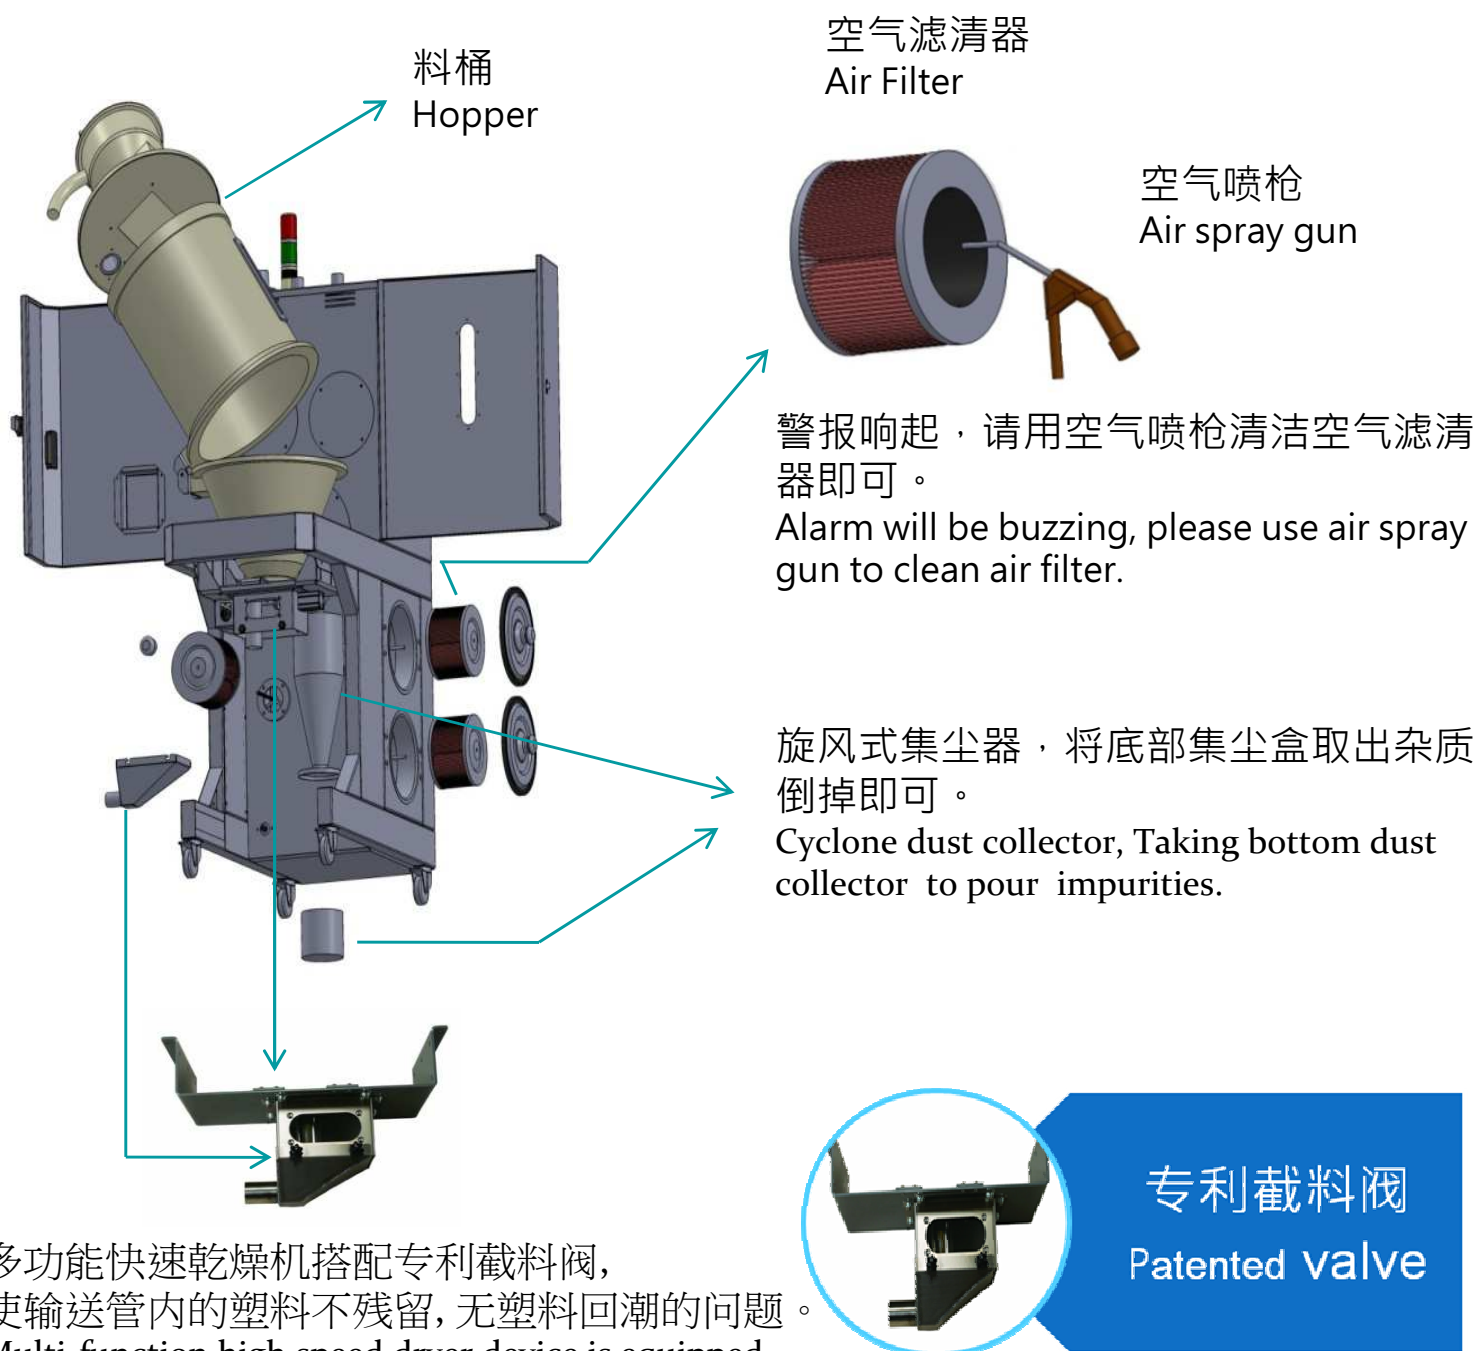


多功能快速干燥机搭配专利截料阀，使输送管内的塑料不残留，无塑料回潮的问题。  
Multi-function high speed dryer device is equipped with patented valve to completely clean the plastic residue such that there will be no plastic material re-dampening problem.



# 多功能快速干燥机-示意图

Multi-function high speed dryer - Schematic diagram

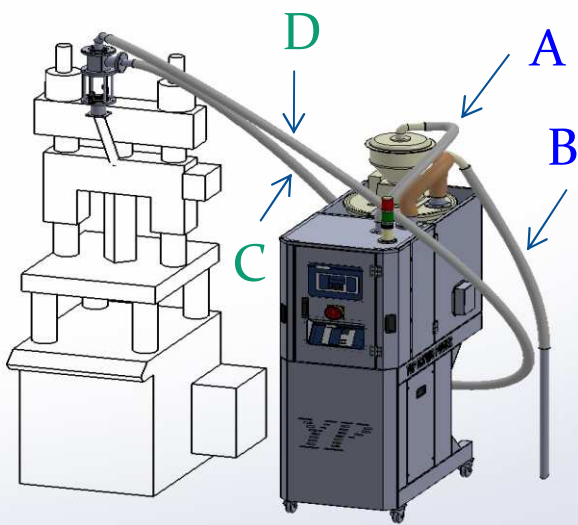

A:YP干燥机吸风


A:Wind has been sucked by YP dryer.

B:将塑料抽入料桶中

B:Plastic material send into hopper.

C:YP干燥机吸风

C:Wind has been sucked by YP dryer.

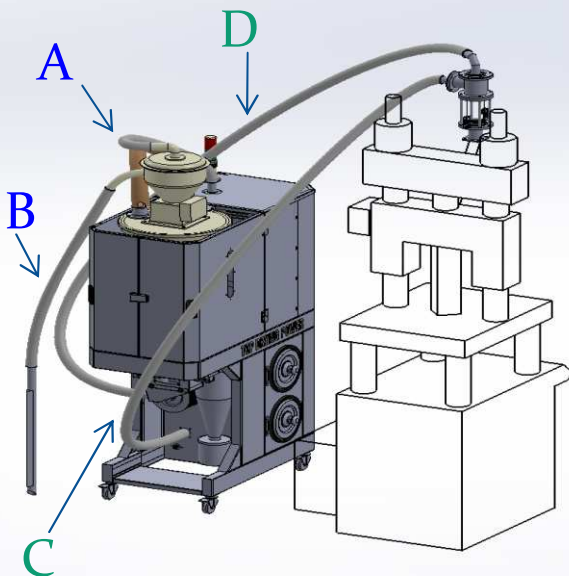

D:将乾燥完成的塑料送至成型机或押出机

D:Drying completed plastic material  
send into injection molding machine  
or extruder machine.

YP 快速乾燥机适用在各种射出机或押出机上

YP high speed dryer is suitable for all kinds of injection molding machine or extruder machine.



依客户需求，干燥机可搭配储料桶，  
报价不含储料桶价格  
Depend on customer demand, our  
dryer could equipped with  
storage can, price does not include  
storage can price.



## 多功能快速干燥机规格表

## Multi-function High Speed Dryer Specification

型式 Model		HS-015MD	HS-025MD	HS-050MD	HS-100MD	HS-200MD
干燥风量(m3/hr) Drying wind rate		30	30	60	120	240
总瓦特数(kw) Total wattage		3.26	3.26	3.95	5.00	7.15
料桶容量(kg) Hopper capacity		15	25	50	100	200
尺寸 Size (mm)	宽度 Width	660	530	530	730	860
	深度 Depth	1220	1090	1090	1250	1500
	高度 High	1680*2160	1680*2160	1680*2160	1780*2250	2040*2475
重量 Weight(kg)		217	217	245	353	473

\*此机台为连续式适用于所有塑料、生产用、实验室

\*This machine is continuous and suitable for all plastics ,production, and laboratory.

# 光学级快速干燥机


## Optics High Speed Dryer

光学级干燥机具有如下特点:

1. 吸料和送料
2. 除湿乾燥

Optics dryer has below features:

1. Suction feeder and Autoloader
2. Dehumidifying

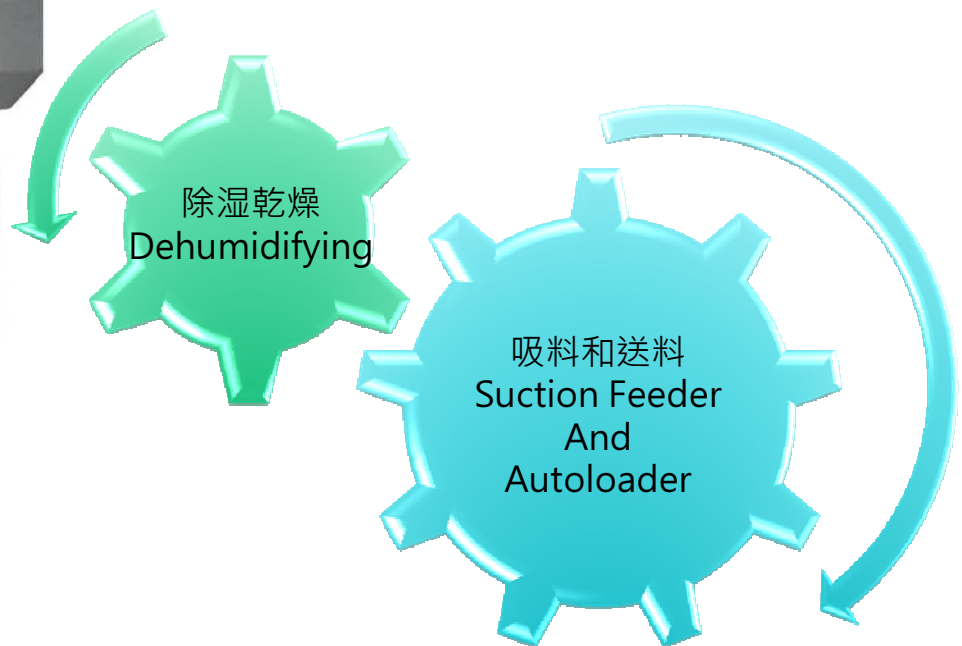

光学级快速乾燥机适用在高精密的工程塑料  
如:光学级PC,光学级PET,光学级PMMA, ....等。

Optics 2-in 1 high speed dryer is suitable for engineering plastics of high precision.

Such as PET, PMMA, PC of optics....ext.


# 光学级快速干燥机-结构

## Optics high speed dryer-Structure

空气滤清器  
Air Filter

空气喷枪  
Air spray gun

警报响起，请用空气喷枪清洁  
空气滤清器即可。  
Alarm will be buzzing, please  
use air spray gun to clean air filter.

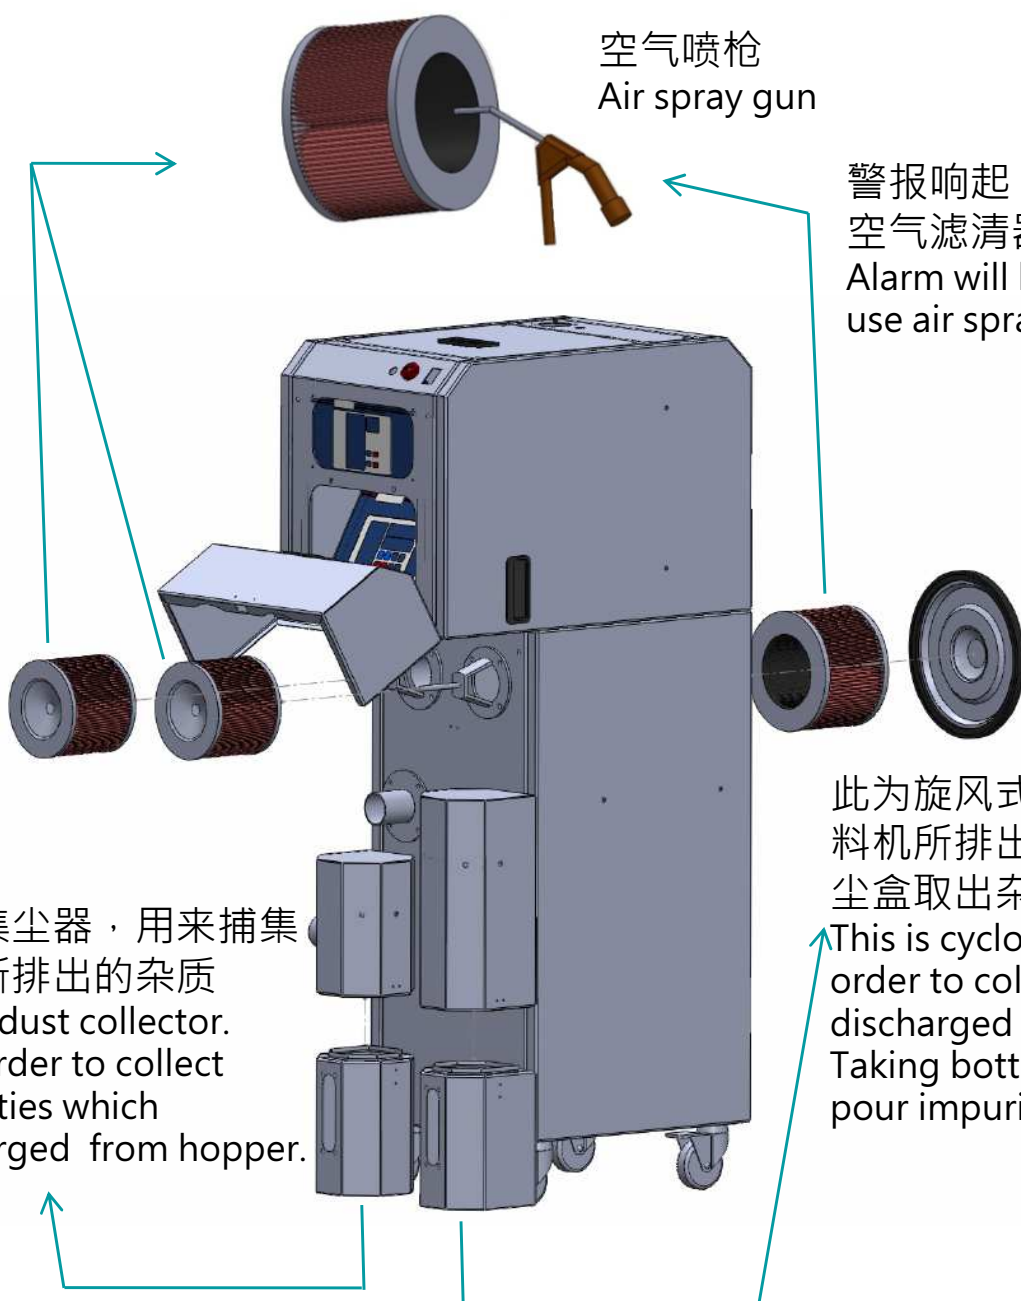


此为集尘器，用来捕集  
料桶所排出的杂质  
This is dust collector.  
In to order to collect  
impurities which  
discharged from hopper.

此为旋风式集尘器，用来捕集吸  
料机所排出的大杂质，将底部集  
尘盒取出杂质倒掉即可。

This is cyclone dust collector. In  
order to collect big impurities which  
discharged from suction feeder.  
Taking bottom dust collector to  
pour impurities.

# 光学级快速干燥机-示意图

## Optics high speed dryer-Schematic diagram

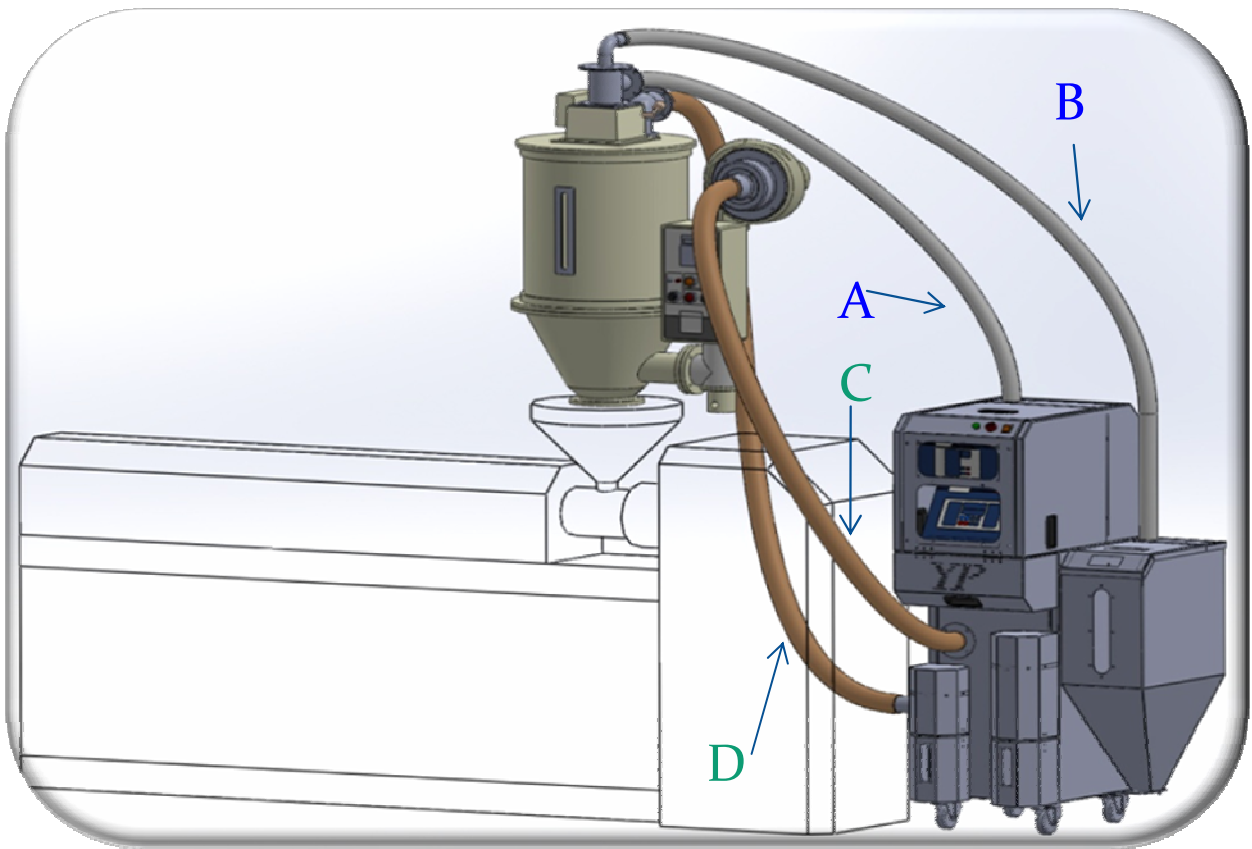

A: YP干燥机吸风

A: Wind has been sucked by YP dryer.

B:将塑料抽入料桶中

B: Plastic material send into hopper.

C: YP干燥机将干燥的风打入料桶中

C: YP dryer send drying wind into hopper.

D:料桶中排放出的杂质送至YP集尘盒

D: Collecting impurities which discharged from hopper send into dust collector.

YP 快速干燥机适用在各种射出机或押出机上

YP high speed dryer is suitable for all kinds of injection molding machine or extruder machine.





依客户需求，干燥机可搭配储料桶，  
报价不含储料桶价格  
Depend on customer demand,  
our dryer could equipped with  
storage can, price does not include  
storage can price.



## 光学级快速干燥机规格表

## Optics High Speed Dryer Specification

型式 Model		HS-006OD	HS-015OD	HS-025OD	HS-050OD
入/回风管径(inch) inlet / outlet air pipe		2"	2"	2.5"	2.5"
电热功率(kw) Electric heating power		2.29	2.59	2.59	3.20
总瓦特数(kw) Total wattage		2.95	3.25	3.40	3.70
送料风机(kw) Feeder blower		0.75	0.75	0.75	0.75
尺寸 Size (mm)	宽度 Width	462	462	462	462
	深度 Depth	690	690	690	690
	高度 High	1330	1430	1430	1430
重量 Weight(kg)		65	72	72.5	75

\*此机台为连续式适用于所有塑料、生产用、实验室

\*This machine is continuous and suitable for all plastics ,production, and laboratory.



# BD 微电脑快速干燥机

## BD Microprocessor Controlled High Speed Dryer



BD 微电脑快速干燥机适用如下:

- 1.射出量大的生产
- 2.押出量大的生产
- 3.经常性换料生产


BD microprocessor controlled high speed dryer is suitable for below items.

- 1.Big injection molding production.
- 2.Big extruding production.
- 3.Frequently changing plastic production




# BD干燥机系列-结构

## BD dryer Series- Structure

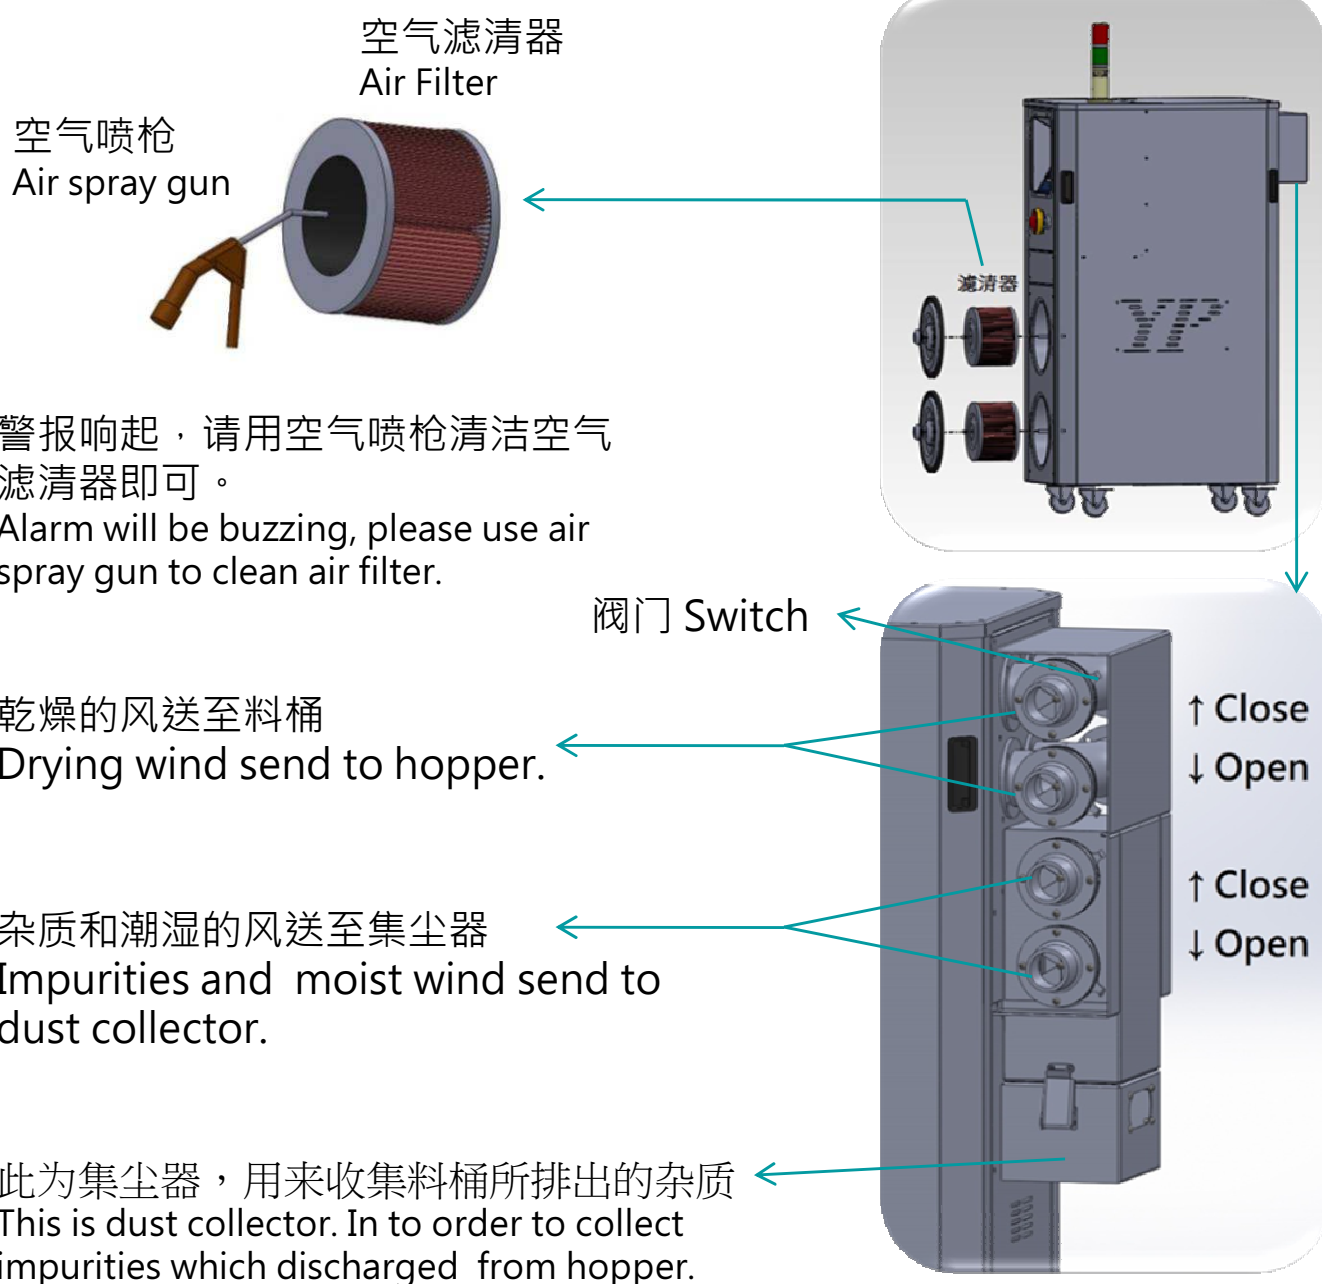


# BD干燥机系列-示意图

## BD Dryer Series-Schematic diagram

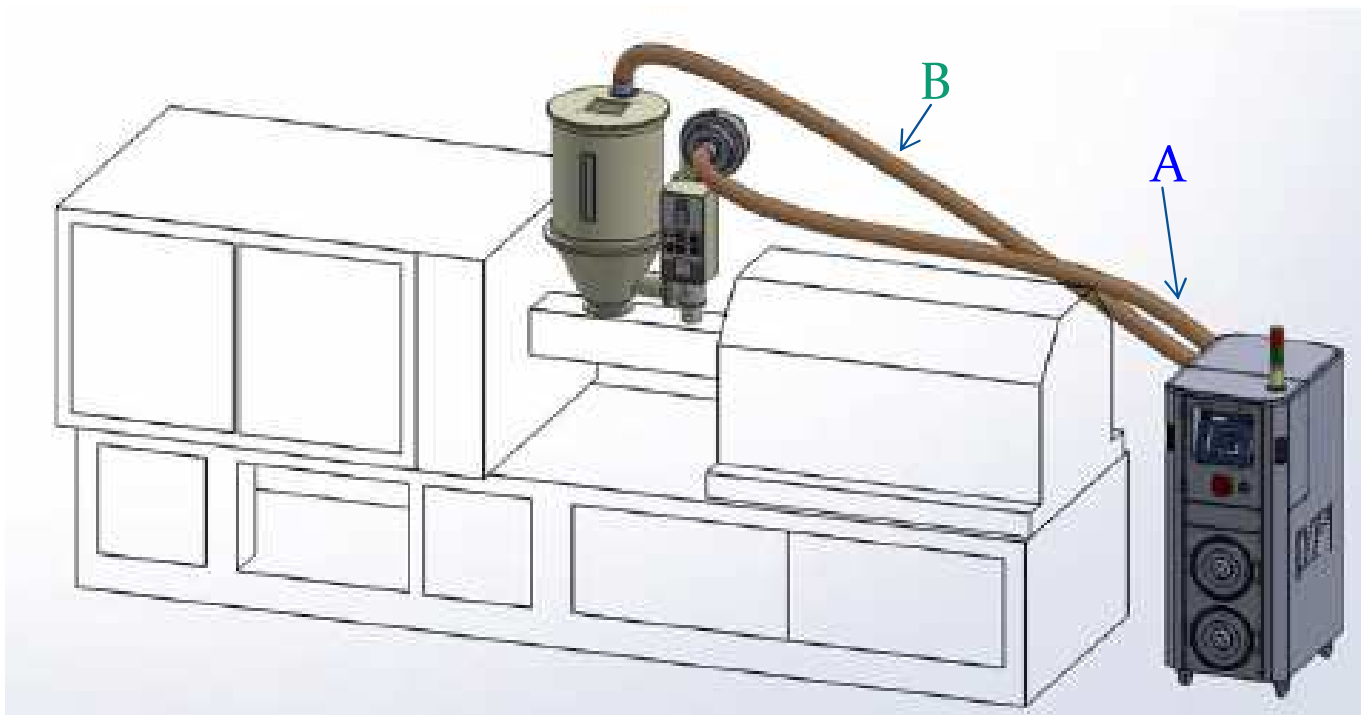

A: YP干燥机送乾燥的风送至料桶中  
A: YP dryer send drying wind into hopper.

B: 杂质和含有湿度的空气送入集尘盒中  
B: Impurities and air of comprising humidity send into dust collector.

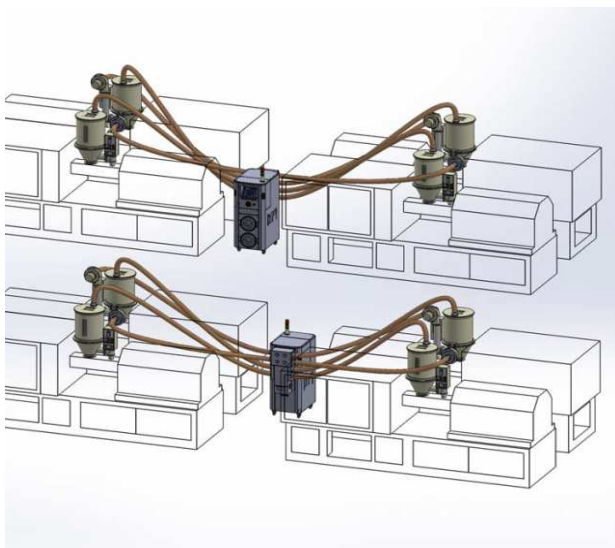

1台HS系列干燥机可连1 ~ 4料桶  
One HS series dryer could connect 1~4 hoppers.

YP快速干燥机适用在各种射出机或押出机上  
YP high speed dryer is suitable for all kinds of injection molding machine or extruder machine.



## BD 微电脑快速干燥机规格表

### BD Microprocessor Controlled High Speed Dryer Specification

型式 Model		HS-025BD	HS-050BD	HS-100BD	HS-200BD	HS-400BD	HS-600BD	HS-800BD
干燥风量 (m <sup>3</sup> /hr) Drying wind rate		30	60	120	220	460	585	850
总瓦特数(kw) Total wattage		2.59	3.20	4.25	6.40	10.60	14.60	16.60
尺寸 Size (mm)	宽度 Width	510	510	535	561	612	637	637
	深度 Depth	869	869	958	993	1062	1096	1116
	高度 High	1515	1515	1573	1631	1747	1805	1805
重量 Weight(kg)		110	130	185	236	381	420	547

\*此机台为连续式适用于所有塑料、生产用、实验室

\*This machine is continuous and suitable for all plastics ,production, and laboratory.

# LD微电脑快速干燥机

LD Microprocessor Controlled High Speed Dryer



LD 微电脑快速干燥机适用如下:

- 1.射出量小的生产
- 2.押出量小的生产
- 3.经常性换料生产



LD microprocessor controlled high speed dryer is suitable for below items.

- 1.Small injection molding production.
- 2.Small extruding production.
- 3.Frequently changing plastic production


# LD干燥机系列-结构

## LD Dryer Series-Structure

隐藏式过滤网  
Concealed Filter

乾燥的风送至料桶  
Drying wind send to hopper.

杂质和潮湿的风送至集尘器  
Impurities and moist wind send to dust collector.

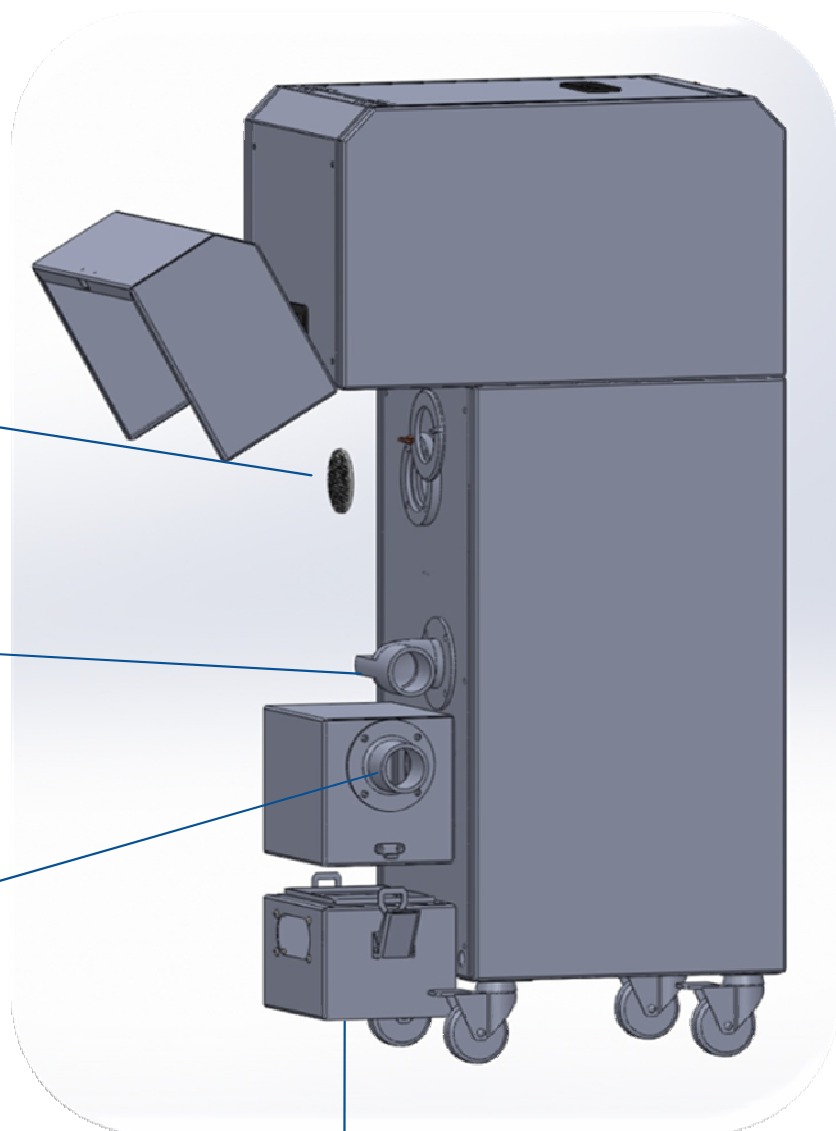


此为集尘器，用来收集料桶所排出的杂质  
This is dust collector.  
In to order to collect impurities  
which discharged from hopper.



# LD干燥机系列示意图

## LD Dryer Series-Schematic diagram

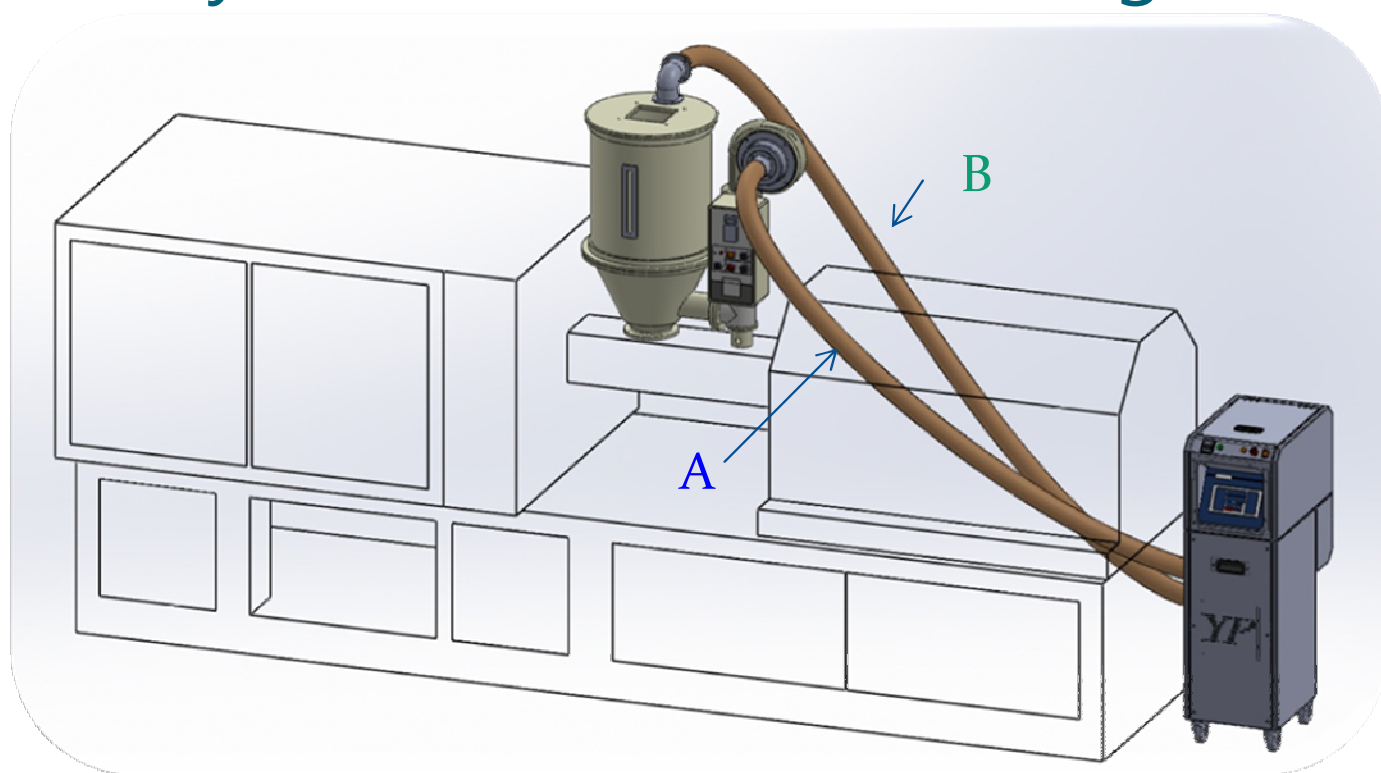

A: YP干燥机送乾燥的风送至料桶中  
A: YP dryer send drying wind into hopper.

B: 杂质和含有湿度的空气送入集尘盒中  
B: Impurities and air of comprising humidity send into dust collector.

YP 快速干燥机适用在各种射出机或押出机上  
YP high speed dryer is suitable for all kinds of injection molding machine or extruder machine.



## LD 微电脑快速干燥机规格表

## LD Microprocessor High Speed Dryer Specification

型式 Model		HS-025LD	HS-050LD	HS-100LD	HS-200LD
干燥风量(m <sup>3</sup> /hr) Drying wind rate		45	60	120	220
总瓦特数(kw) Total wattage		2.59	3.20	4.25	6.40
尺寸 Size (mm)	宽度 Width	360	360	395	395
	深度 Depth	750	750	780	780
	高度 High	1180	1180	1332	1332
重量 Weight(kg)		66.2	68.0	97.5	115.0

\*此机台为连续式适用于所有塑料、生产用、实验室

\*This machine is continuous and suitable for all plastics ,production, and laboratory.



# YP 快速乾燥机 YP High Speed Dryer

省钱	Save Money
快速	High Speed
节能	Save Energy

烨品企业有限公司  
电话 :+886-3-409-0577  
传真 :+886-3-409-3381  
网址 :[www.ye-pin.com.tw](http://www.ye-pin.com.tw)  
国内联络e-mail : [yepin.com@msa.hinet.net](mailto:yepin.com@msa.hinet.net)  
国外联络e-mail : [service@ye-pin.com.tw](mailto:service@ye-pin.com.tw)

YE PIN CO., LTD.  
TEL:+886-3-409-0577  
FAX:+886-3-409-3381  
Website :[www.ye-pin.com.tw](http://www.ye-pin.com.tw)  
Domestic contact e-mail: [yepin.com@msa.hinet.net](mailto:yepin.com@msa.hinet.net)  
Foreign contact e-mail: [service@ye-pin.com.tw](mailto:service@ye-pin.com.tw)